


SIRIUS

**C3
Color
Wax-Resin**




THERMAL TRANSFER RIBBONS

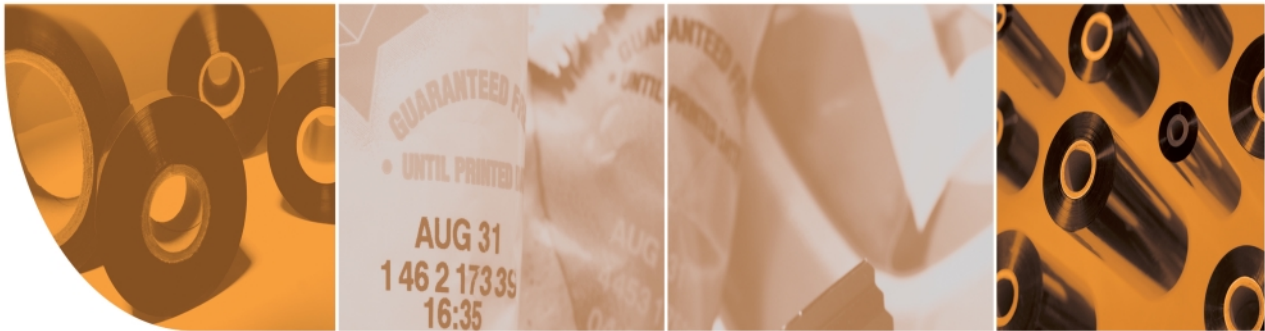

TTR Properties

Base Film Thickness	4.5 ± 1.0μ
Ink Color	Red, Blue, & Green
Ink Melting Point	85°C
Maximum Print Speed	300 mm / second

C3

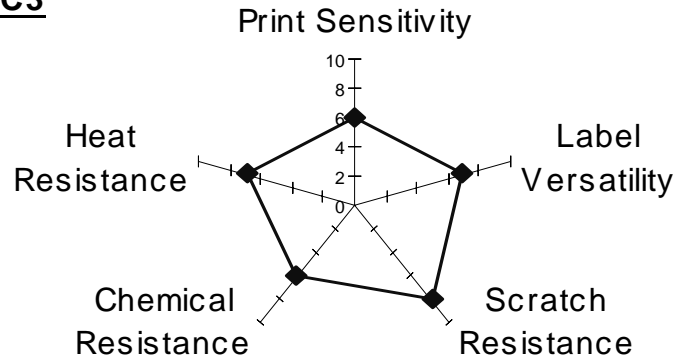

Dynic USA Corporation
4750 N.E. Dawson Creek Drive
Hillsboro, Oregon 97124
Phone (800) 326-1249
(503) 693-1070
Fax (503) 648-1185
www.dynic.com

Notes:

1. This chart shows Dynic USA Corporation's C3 Color Wax-Resin formulation on typical receiving materials.
2. Dynic USA recommends that the ribbon be tested independently to match specific label requirements, and in order to determine optimum print conditions and speed.
3. Test results may vary depending on label and printing conditions.
4. Storage: 5° to 35°C; 30 to 85% RH. Shelf Life: 1 Year.
5. Dynic USA Corporation reserves the right to change any Dynic product specifications without prior notice, provided there is no change in product performance.