


SIRIUS

**HL35
Resin for
Fabric**



THERMAL TRANSFER RIBBONS

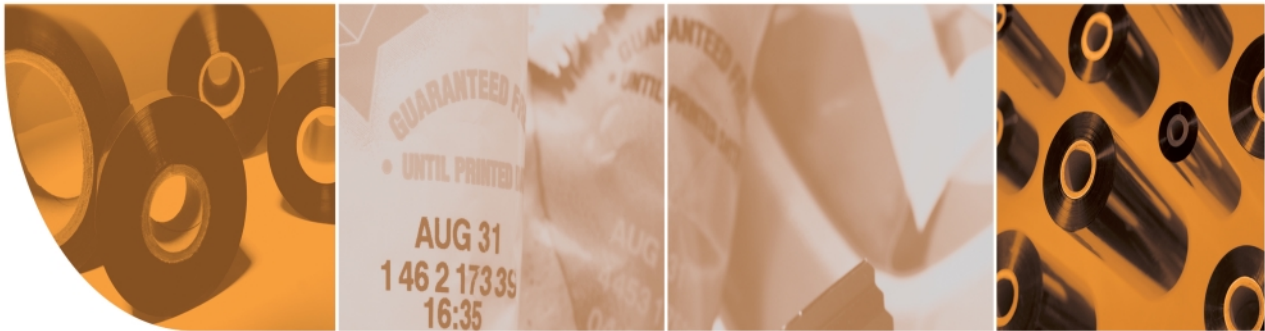


TTR Properties

Base Film Thickness	4.5 ± 1.0μ
Total Thickness	6.5 ± 1.0μ
Ink Color	Black
Ink Melting Point	80 ~ 86°C

Receiving Materials

Papers	Coated & Synthetic
Films	Plastic
Fabrics	Satins
Coated Textile Labels	CETUS®

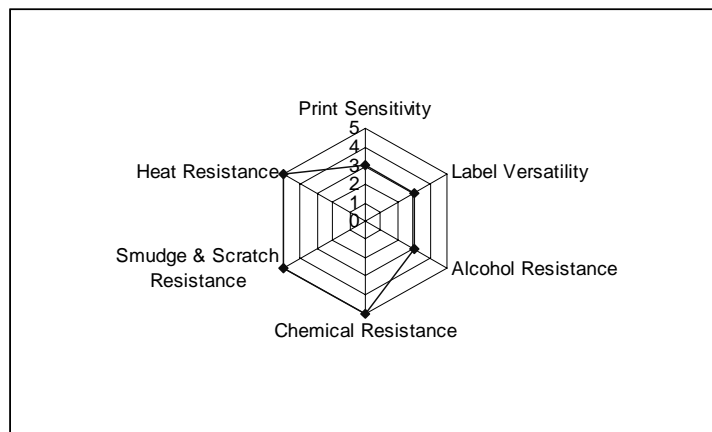

Dync USA Corporation
4750 N.E. Dawson Creek Drive
Hillsboro, Oregon 97124
Phone (800) 326-1249
(503) 693-1070
Fax (503) 648-1185
www.dync.com

Notes:

1. This chart shows Dync USA Corporation's HL35 Resin for Fabric formulation on typical receiving materials.
2. Dync USA recommends that the ribbon be tested independently to match specific label requirements, and in order to determine optimum print conditions and speed.
3. Test results may vary depending on label and printing conditions.
4. Storage: 5° to 35°C; 30 to 85% RH. Shelf Life: 1 Year.
5. Dync USA Corporation reserves the right to change any Dync product specifications without prior notice, provided there is no change in product performance.