

# SIRIUS

**HL35Plus  
White Resin  
for Fabric**



## THERMAL TRANSFER RIBBONS



### TTR Properties


Base Film Thickness	4.5 ± 1.0μ
Ink Color	White
Ink Melting Point	83°C

## Receiving Materials

Fabrics

Coated Textile Labels

CETUS®

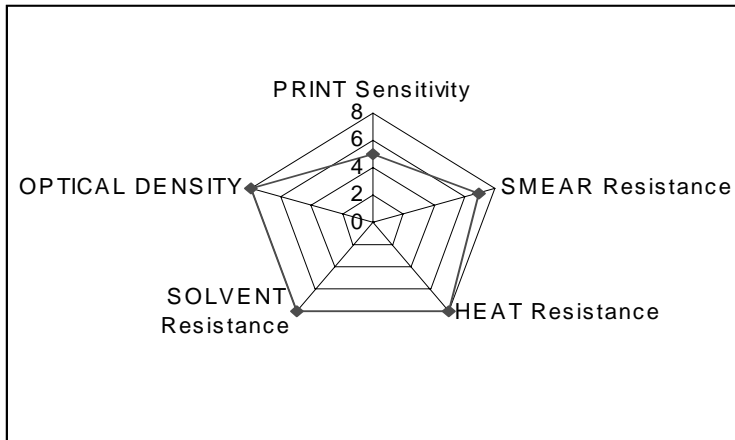

Dynic USA Corporation  
4750 N.E. Dawson Creek Drive  
Hillsboro, Oregon 97124  
Phone (800) 326-1249  
(503) 693-1070  
Fax (503) 648-1185  
[www.dynic.com](http://www.dynic.com)

### Notes:

1. This chart shows Dynic USA Corporation's HL35Plus White Resin for Fabrics formulation on typical receiving materials.
2. Dynic USA recommends that the ribbon be tested independently to match specific label requirements, and in order to determine optimum print conditions and speed.
3. Test results may vary depending on label and printing conditions.
4. Storage: 5° to 35°C; 30 to 85% RH. Shelf Life: 1 Year.
5. Dynic USA Corporation reserves the right to change any Dynic product specifications without prior notice, provided there is no change in product performance.