


# SIRIUS

**HL35Plus  
Resin for  
Fabric**



## THERMAL TRANSFER RIBBONS

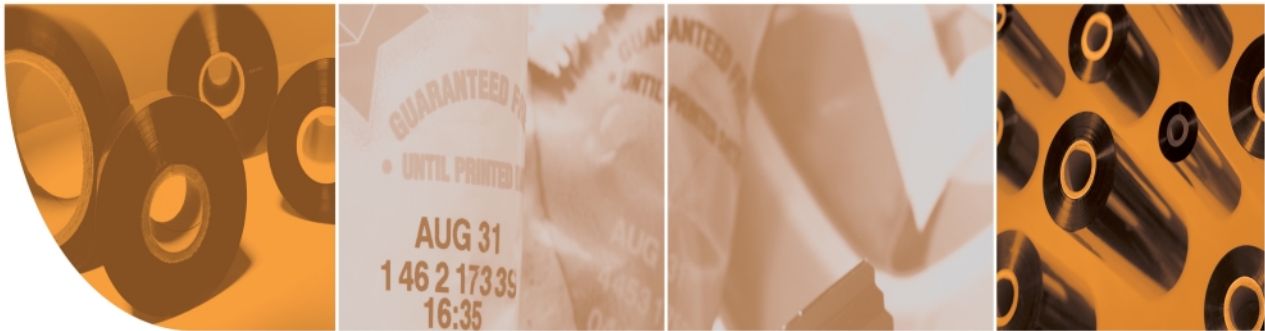


### TTR Properties

Base Film Thickness	4.5 ± 1.0μ
Total Thickness	6.5 ± 1.0μ
Ink Color	Black
Ink Melting Point	80~90°C

## Receiving Materials

Films Plastic  
Fabrics Satins  
Coated Textile Labels CETUS®

### HL35Plus

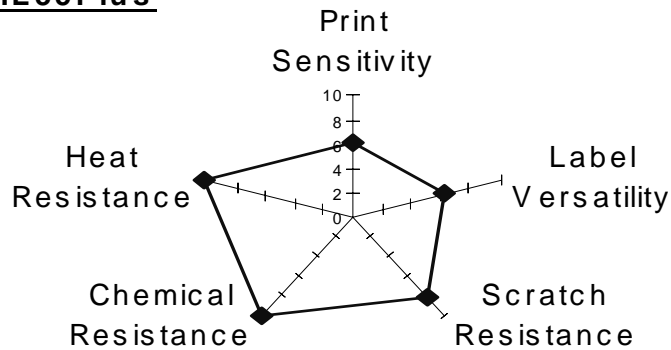

Dynic USA Corporation  
4750 N.E. Dawson Creek Drive  
Hillsboro, Oregon 97124  
Phone (800) 326-1249  
(503) 693-1070  
Fax (503) 648-1185  
www.dynic.com

#### Notes:

1. This chart shows Dynic USA Corporation's HL35Plus Resin for Fabric formulation on typical receiving materials.
2. Dynic USA recommends that the ribbon be tested independently to match specific label requirements, and in order to determine optimum print conditions and speed.
3. Test results may vary depending on label and printing conditions.
4. Storage: 5° to 35°C; 30 to 85% RH. Shelf Life: 1 Year.
5. Dynic USA Corporation reserves the right to change any Dynic product specifications without prior notice, provided there is no change in product performance.