


SIRIUS

LR21 Resin



THERMAL TRANSFER RIBBONS

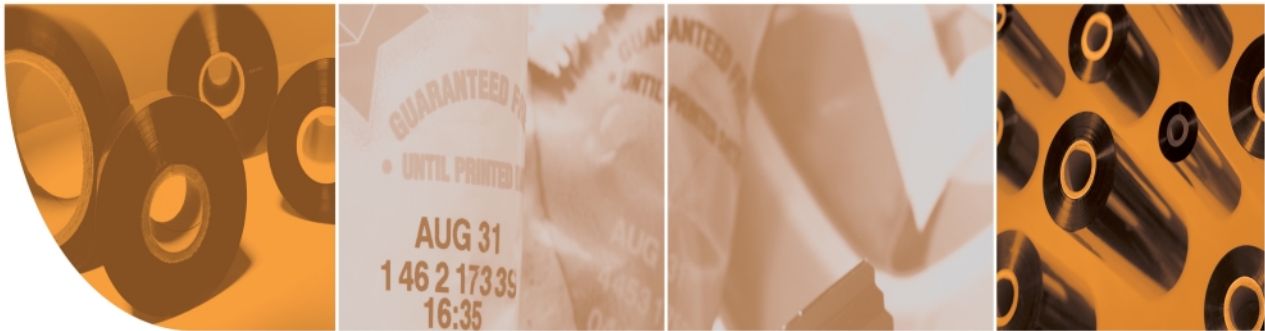

TTR Properties

Total Thickness	< 9.0 μ
Ink Color	Black
Ink Melting Point	110°C

Receiving Materials


Papers
Film

Synthetic
PET & PVC

Resistance

Scratch
Smear
Chemical
Heat

Excellent
Excellent
Excellent
Good

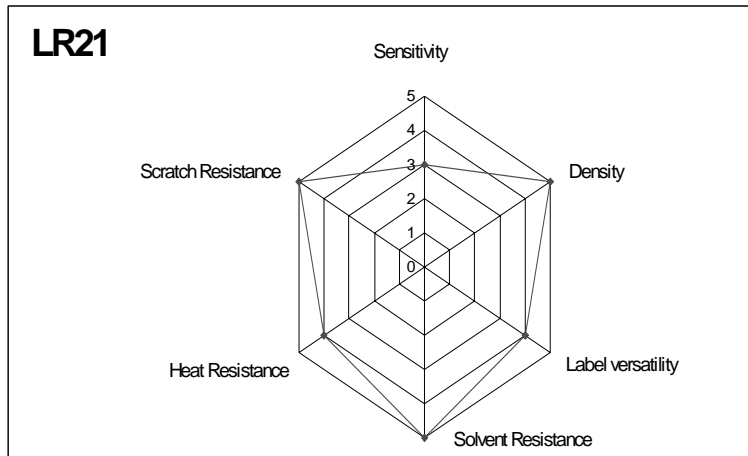

Dynic USA Corporation
4750 N.E. Dawson Creek Drive
Hillsboro, Oregon 97124
Phone (800) 326-1249
(503) 693-1070
Fax (503) 648-1185
www.dynic.com

Notes:

1. This chart shows Dynic USA Corporation's LR21 Resin formulation on typical receiving materials.
2. Dynic USA recommends that the ribbon be tested independently to match specific label requirements, and in order to determine optimum print conditions and speed.
3. Test results may vary depending on label and printing conditions.
4. Storage: 5° to 35°C; 30 to 85% RH. Shelf Life: 1 Year.
5. Dynic USA Corporation reserves the right to change any Dynic product specifications without prior notice, provided there is no change in product performance.