


SIRIUS

NK45 Resin



THERMAL TRANSFER RIBBONS

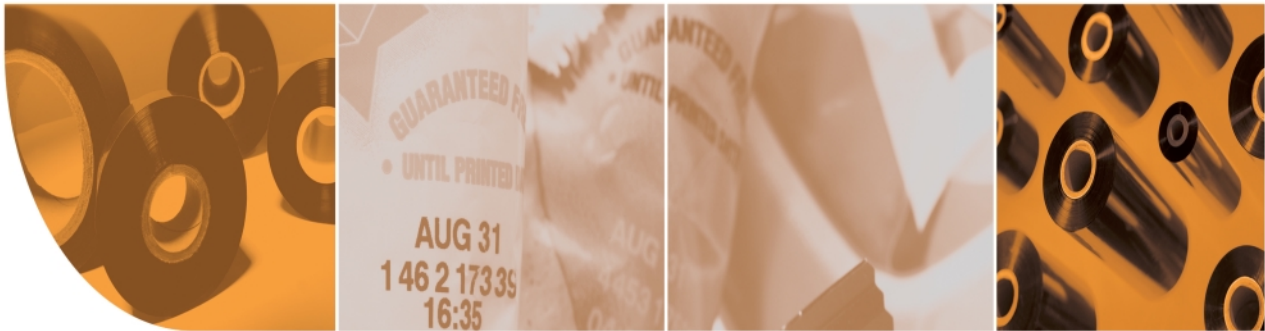

TTR Properties

Base Film Thickness	4.5 ± 1.0μ
Total Thickness	7.0 ± 1.0μ
Ink Color	Black
Ink Melting Point	83°C

Receiving Materials

Papers

Coated & Gloss

Synthetics

Polypropylene & Polyester

Films

PET

Resistance

Scratch & Smear

Good

Chemical

Very Good

Alcohol


Excellent

Heat

Good

Water

Excellent

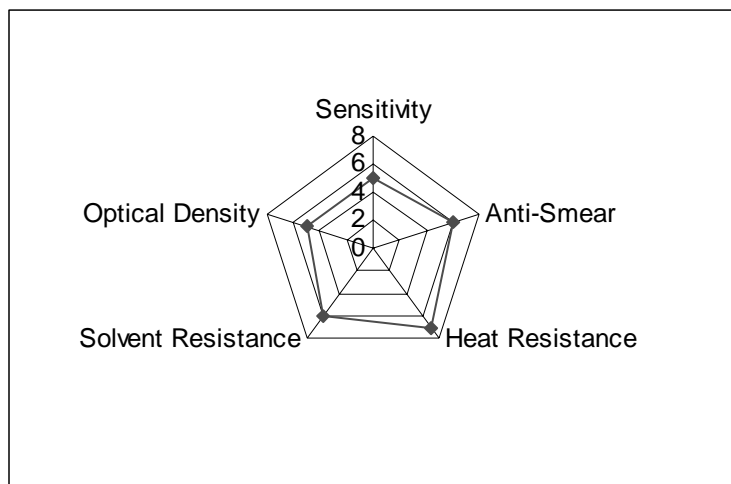

Dynic USA Corporation
4750 N.E. Dawson Creek Drive
Hillsboro, Oregon 97124
Phone (800) 326-1249
(503) 693-1070
Fax (503) 648-1185
www.dynic.com

Notes:

1. This chart shows Dynic USA Corporation's NK45 Resin formulation on typical receiving materials.
2. Dynic USA recommends that the ribbon be tested independently to match specific label requirements, and in order to determine optimum print conditions and speed.
3. Test results may vary depending on label and printing conditions.
4. Storage: 5° to 35°C; 30 to 85% RH. Shelf Life: 1 Year.
5. Dynic USA Corporation reserves the right to change any Dynic product specifications without prior notice, provided there is no change in product performance.