




THERMAL TRANSFER RIBBON
TECHNICAL DATA SHEET

FTX205 Economy Wax/Resin

Product Description

FTX205 is designed for use on high speed and high resolution printers. The FTX205 is a performance wax/resin formula that offers exceptional print quality to paper and coated stock but at a more economical price than many comparable products in the market.

Rader Chart

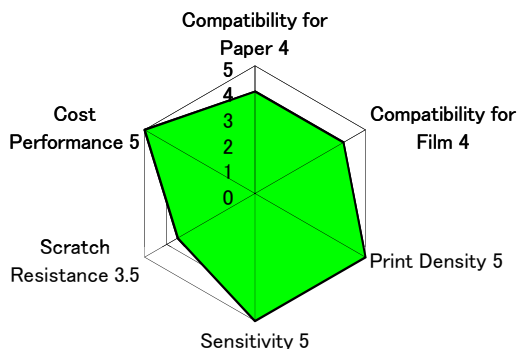

*Performance above are rated being compared among the wax/resin categories of Fujicopian FTX200 series.

Applications

- Shipping Labels
- Storage Labels
- Retail Tags
- Pharmaceutical Labels
- Flexible Package Labels

Recommended Label Stock

- Coated Paper
- Synthetic Paper
- Polyolefin
- Polyester
- Polypropylene
- Polyethylene

Product Specifications

Description	Specification
Ink Type	Wax/Resin
Total Thickness	8.0 +/-1.0 Micrometer
Base Film Thickness	4.5 +/-0.5 Micrometer
Ink Thickness	3.5 +/-0.5 Micrometer
Ink Melting Point	80°C
Print Speed	up to 12 ips
Print Density	2.0 Densitometer

*Print density depends on print conditions.

Storage Conditions

- Temperature: 5 to 35°C (41 to 95F)
- Humidity: 45 to 85 % RH
- Keep away from direct sunlight., high temperature and humidity.

NORTH & SOUTH AMERICA FUJICOPIAN (USA), INC.

PO Box 1118
1214 State Highway 34E
Winnsboro, SC 29180 U.S.A.
TEL +1-803-635-9799 , 1-800-441-3854
FAX +1-803-635-1000
E-mail: info@fujicopianusa.com
Website: <http://www.fujicopianusa.com>

EUROPE & AFRICA FUJI COPIAN (U.K.) LTD.

Bailey Court, Bailey Drive
Gillingham Business Park
Gillingham, Kent ME8 0PZ England
TEL +44-1634-371137
FAX: +44-1634-366560
E-mail: sales@fujicopian.co.uk
Website: <http://www.fujicopian.co.uk>

ASIA-PACIFIC FUJICOPIAN CO., LTD.

Tokyo Branch
Kamei Bldg., 2-17-13 Kiba,
Koto-ku, Tokyo 135-8525 Japan
TEL +81-3-3642-0371
FAX +81-3-3642-0610
E-mail: info@fujicopian.com
Website: <http://www.fujicopian.com>