




THERMAL TRANSFER RIBBON
TECHNICAL DATA SHEET

FTX306


Ultra Durable Resin

Product Description

FTX306 is a premium resin formula that offers sharp printing that is ideal for bar codes, fine lines and small characters. The fine line printing ability is complimented by outstanding abrasion resistance and excellent chemical and heat resistance.

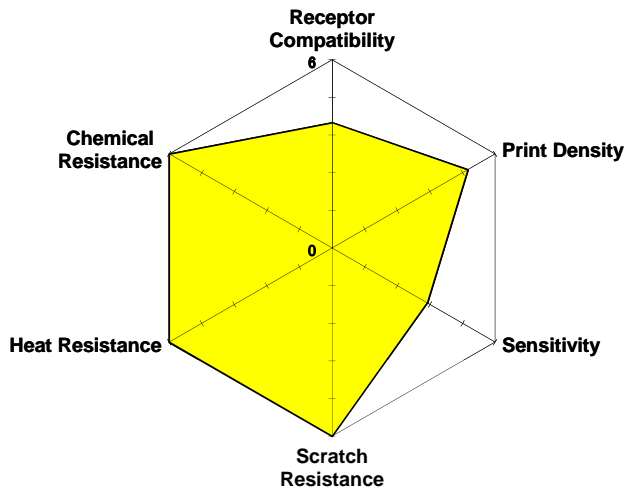

Chemical Resistance

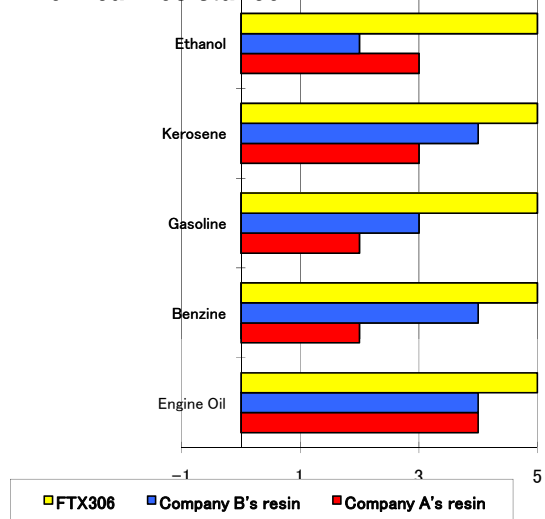

Product Specifications

Description	Specification
Ink Type	Resin
Total Thickness	7.0 +/-1.0 Micrometer
Base Film Thickness	4.5 +/-0.5 Micrometer
Ink Thickness	1.6 +/-0.5 Micrometer
Ink Melting Point	90°C
Print Speed	up to 6 ips
Print Density	2.2 Densitometer

*Print density depends on print conditions.

Recommended Label Stock

- Polyester
- Silver Matte PET
- Synthetic Paper
- PVC Cards
- Polyimide

Storage Conditions

- Temperature: 5 to 35°C (41 to 95F)
- Humidity: 45 to 85 % RH
- Keep away from direct sunlight., high temperature and humidity.

NORTH & SOUTH AMERICA
FUJICOPIAN (USA), INC.
 PO Box 1118
 1214 State Highway 34E
 Winnsboro, SC 29180 U.S.A.
 TEL +1-803-635-9799 , 1-800-441-3854
 FAX +1-803-635-1000
 E-mail: info@fujicopianusa.com
 Website: http://www.fujicopianusa.com

EUROPE & AFRICA
FUJI COPIAN (U.K.) LTD.
 Bailey Court, Bailey Drive
 Gillingham Business Park
 Gillingham, Kent ME8 0PZ England
 TEL +44-1634-371137
 FAX: +44-1634-366560
 E-mail: sales@fujicopian.co.uk
 Website: http://www.fujicopian.co.uk

ASIA-PACIFIC
FUJICOPIAN CO., LTD.
 Tokyo Branch
 Kamei Bldg., 2-17-13 Kiba,
 Koto-ku, Tokyo 135-8525 Japan
 TEL +81-3-3642-0371
 FAX +81-3-3642-0610
 E-mail: info@fujicopian.com
 Website: http://www.fujicopian.com