


SIRIUS

**NK45
White Resin**



THERMAL TRANSFER RIBBONS

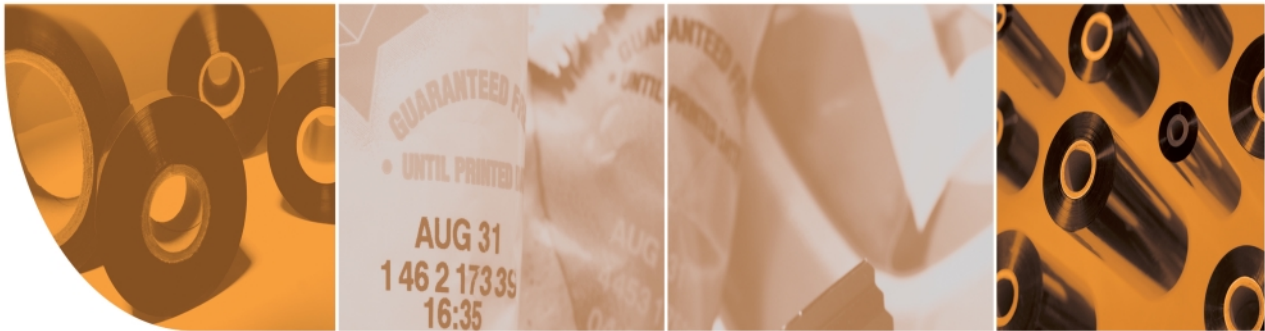

TTR Properties


Base Film Thickness	4.5 ± 1.0μ
Total Thickness	7.0 ± 1.0μ
Ink Color	White
Ink Melting Point	83°C

Receiving Materials

Papers	Coated & Gloss
Synthetics	Polypropylene & Polyester
Films	PET

Resistance

Scratch & Smear	Good
Chemical	Very Good
Alcohol	Excellent
Heat	Good
Water	Excellent

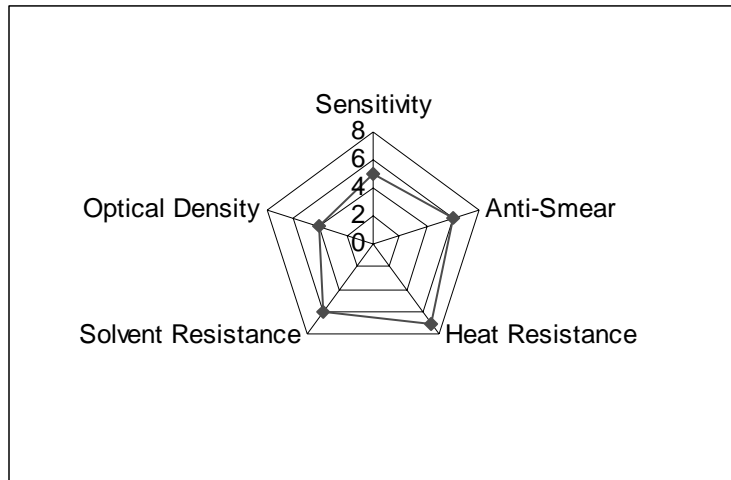

Dynic USA Corporation
4750 N.E. Dawson Creek Drive
Hillsboro, Oregon 97124
Phone (800) 326-1249
(503) 693-1070
Fax (503) 648-1185
www.dynic.com

Notes:

1. This chart shows Dynic USA Corporation's NK45 White Resin formulation on typical receiving materials.
2. Dynic USA recommends that the ribbon be tested independently to match specific label requirements, and in order to determine optimum print conditions and speed.
3. Test results may vary depending on label and printing conditions.
4. Storage: 5° to 35°C; 30 to 85% RH. Shelf Life: 1 Year.
5. Dynic USA Corporation reserves the right to change any Dynic product specifications without prior notice, provided there is no change in product performance.