


SIRIUS

S2 Stellar Wax



THERMAL TRANSFER RIBBONS

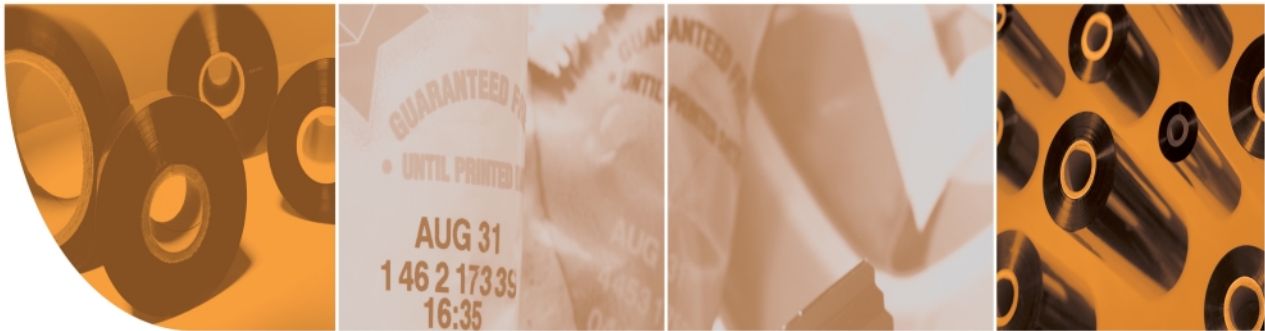

TTR Properties

Base Film Thickness	4.5 ± 1.0μ
Total Thickness	7.5 ± 1.0μ
Ink Color	Black
Ink Melting Point	68°C
Maximum Print Speed	300 mm / second


Receiving Materials

Papers
Synthetics

Uncoated, Coated, & Gloss
Polypropylene & Polyester

Resistance

Scratch	Good
Smear	Good
Chemical	Average
Alcohol	Average
Heat	Average
Water	Good

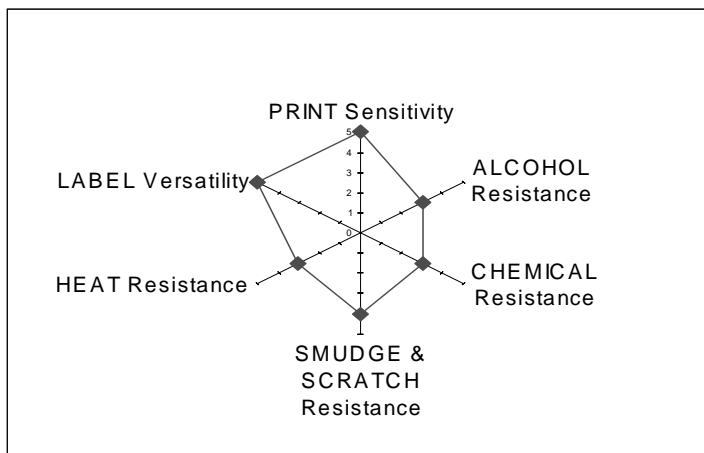

Dynic USA Corporation
4750 N.E. Dawson Creek Drive
Hillsboro, Oregon 97124
Phone (800) 326-1249
(503) 693-1070
Fax (503) 648-1185
www.dynic.com

Notes:

1. This chart shows Dynic USA Corporation's S2 Stellar Wax formulation on typical receiving materials.
2. Dynic USA recommends that the ribbon be tested independently to match specific label requirements, and in order to determine optimum print conditions and speed.
3. Test results may vary depending on label and printing conditions.
4. Storage: 5° to 35°C; 30 to 85% RH. Shelf Life: 1 Year.
5. Dynic USA Corporation reserves the right to change any Dynic product specifications without prior notice, provided there is no change in product performance.